







BTT-500 8S

Top performing air unit with blower housing made of polyethylene by progressive development with 14.100 m³/h as highest flow rate.

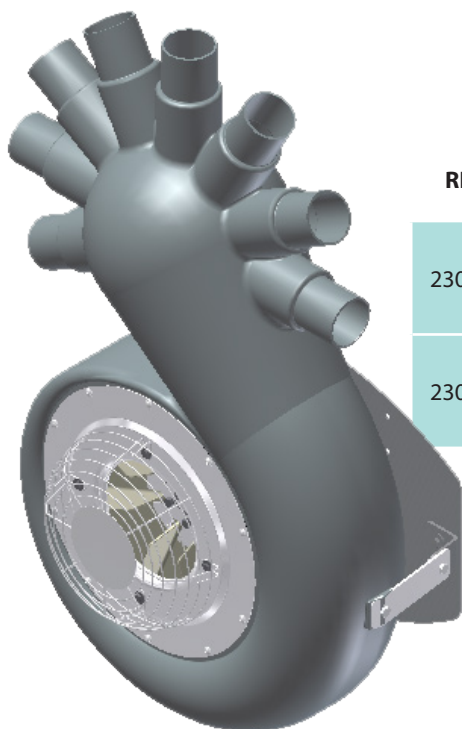

REFERENCE		Ratio				
230.510.247.00	M 1+0	1 / 7,5	Ø500 x 2	1 x Ø100/120	Polyethylene	3 shoes
230.510.347.00	M 2+0	1 / 7,5 - 1 / 6,5	Ø500 x 2	1 x Ø100/120	Polyethylene	3 shoes

Gear box with aluminium case and helicoidal gear teeth, 1 or 2 speeds + neutral point.


Ø500 mm centrifugal injected and balanced **double fan**.

Exit mouth with Ø100/120 mm 8-outlets distributor.

Clutch with 3 automatic and progressive shoes of smooth starting.


Protective grids on suction exits according to ISO-EN rules.

PERFORMANCE BOARD					
Gear box speed		1:6,5		1:7,5	
		I		II	
r.p.m					
400	m ³ /h	9.600		12.600	
	m/s	49		59	
	hp kW	17 12	20 15		
500	m ³ /h	10.000		13.100	
	m/s	55		66	
	hp kW	22 16	28 21		
540	m ³ /h	10.700		14.100	
	m/s	59		71	
	hp kW	31 23	36 26		

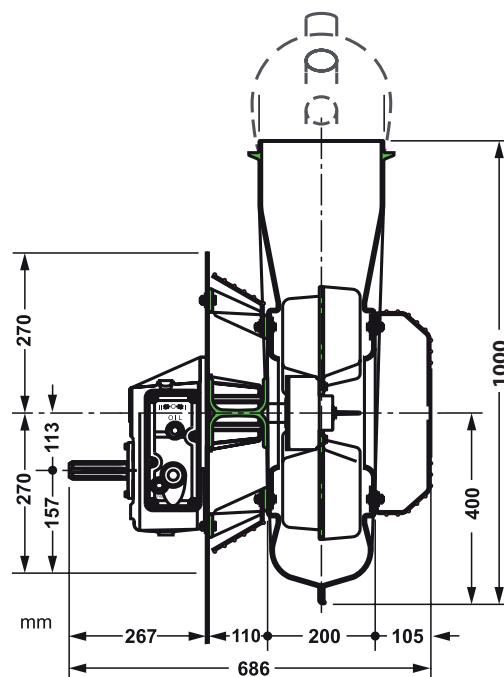


- **Reduction of phytosanitary product**
- **Reduction of power consumption by tractor**
- **Deepest penetration**
- **Proportional distribution**
- **Minimal drift**

*CLAMPS' SET INCLUDED



Specify whether you require male (M) or female 1-3/8"Z6 inlet shaft



MAIN PLATE FOR LIFT-MOUNTED EQUIPMENT

AVAILABLE WITH HYDRAULIC ENGINE